



Film Capacitors – Power Factor Correction

Multi-Measuring-Interface MMI7000

Series/Type: MMI7000
Ordering code: B44066M7...E230
Date: June 2010
Version: 1

© EPCOS AG 2015. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

EPCOS AG is a TDK Group Company.

Characteristics

- Measuring device for three-phase measuring and display of numerous grid parameters:
 - Voltage 3-phase
 - Current 3-phase
 - Frequency 3-phase
 - Active power 3-phase
 - Reactive power 3-phase
 - Apparent power 3-phase
 - Power factor 3-phase
 - Energy
 - Harmonic of voltage up to 51st
 - Harmonic of current up to 51st
 - THD-V 3-phase
 - THD-I 3-phase

- LCD full graphic display

- Switchboard installation housing

- Three versions available:
 - MMI7000-B (basic version)
 - MMI7000-S (including two independent interfaces RS485)
 - MMI7000-E (extended version with additional interface, memory card and additional in- and outputs)

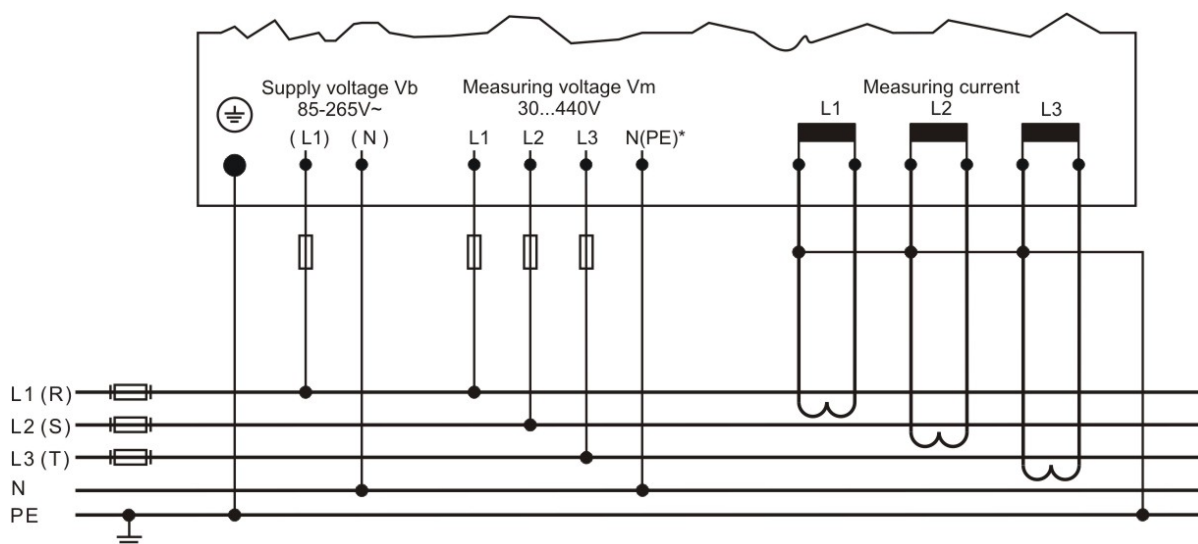


Technical data and specifications

Operating voltage	110 ... 230 V AC +/- 15%
Measuring voltage (3-phase)	30 ... 440 V AC (L-N) 50 ... 690 V AC (L-L)
Measuring current (3-phase)	X:1A / X:5A
Rated frequency f_R	50 and 60 Hz
Power consumption	< 5 VA
Sensitivity	50 mA / 10 mA

Operation and display	
Menu languages	English/German/Russian/Spanish/Turkish
Display/display functions	Illuminated full graphic display 128 x 64 dots
Display of grid parameters as real value/ in %/ as bar chart	3-phase cos-φ, V, I, F, Q, P, S, THD-V, THD-I, W
Large display of 3 grid parameters	Selection in Display Editor
Display of harmonics	3 rd – 51 st harmonic of voltage and current also as bar chart
Osci-mode	Available
Accuracy	Current/voltage: 1% Real power, reactive power, apparent power: 2%
Integrated help function with HELP-button	Context dependent, plain menu
Storage functions with time stamp	
Storage of minimum values, maximum values	Voltage, current, real power, reactive power, apparent power, THD-V, THD-I, frequency, temperatures
Storage of operation time	2 counters
Additional functions MMI7000-E	
Control inputs	1 potential free signal input 110 ... 230 V AC
Switching outputs (freely programmable)	4 potential free relay outputs (max 250 V/1000 W) 1 potential free transistor output (max 60 V/40 mA)
Interface	1 x RS485 (Modbus RTU)
Pluggable SD-Card for storage of all grid parameter accord. pre-set measuring interval (included in the delivery)	Voltage, current, real power, reactive power, apparent power, temperature, frequency, THD-V, THD-I, energy, single harmonic of voltage and current
Recording time per data file at measuring interval 1 / 10 / 60 sec./ 15 min.	18 hours / 7 days / 48 days / 720 days
Software for PC	Comfortable software (CD) for display and evaluation of recorded measuring values

Miscellaneous	
Housing MMI7000-B MMI7000-S / MMI7000-E	Switchboard installation housing DIN 43700 / IEC61554 144 x 144 x 35 mm 144 x 144 x 60 mm
Weight	Ca. 1 kg
Operating ambient temperature	-10 ... +50 °C
Storage temperature	-20 ... +60 °C
Degree of protection according IEC60529	Front: IP54 Rear: IP20
Protection class	I (devices with protective earth conductor)
Safety regulations	IEC61010-1:2001, EN61010-1:2001
EMV interference resistance	IEC61000-4-2: 8 kV; IEC61000-4-4: 4 kV
Ordering codes	
MMI7000-B	B44066M7100E230
MMI7000-S	B44066M7200E230
MMI7000-E	B44066M7300E230

Connecting diagram MMI7000-B


Cautions and warnings

General

- The MMI7000 may only be used for the purpose it has been designed for.
- The device has to be projected in such a way that in case of any failure no uncontrolled high current and voltages may occur.
- The device in operation has to be protected against moisture and dust, sufficient cooling has to be assured.
- Please note that the device is under high tension during operation.
- The MMI7000 may only be used indoor. It is not suitable for outdoor applications.
- Voltages above the permitted voltage range may damage the device.

Attention

FAILURE TO FOLLOW CAUTIONS MAY RESULT, WORST CASE, IN PREMATURE FAILURES OR PHYSICAL INJURY.

Note

For detailed information about PFC capacitors and cautions, refer to the latest version of EPCOS PFC Product Profile.

Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
6. Unless otherwise agreed in individual contracts, **all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI)**.
7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.